

THE FASTEST GYPSUM LEVELLING COMPOUND IN THE WORLD.

UZIN NC 112 Turbo – ready to accept floor coverings after only 6 hours.



UZIN NC 112 Turbo: ready to accept floor coverings after 6 hours.

With UZIN NC 112 Turbo, UZIN introduces the world's first rapid drying gypsum based levelling compound. Thanks to the new, reactive binding agent and innovative additives, a larger proportion of the mixing water is bound within the levelling compound. As a result less water evaporates and the smoothing compound dries quicker. Most gypsum based smoothing compounds which are on the market allow for floor coverings to be installed after 24 hours when applied at 5 mm, but UZIN NC 112 Turbo is ready to accept most floor coverings after just six hours. The new "Super Fast Technology" from UZIN improves the drying performance even in poor climate conditions and combines the advantages of gypsum-based products with those of cementitious levelling compounds.

The new formula has been a development of the Level Plus Effect, which has become the Level Plus Effect S. The characteristics found in the former remain but now benefit from being faster, more reliable and stronger. As a result there are no more unproductive waiting times and no more second trips to the job site. In short, the world's fastest gypsum levelling compound.

- **Speed**

Ready to accept floor coverings after 6 hours because of the innovative, reactive binding agent and new additive.

- **Strength**


Strong surface strength and high strength development because of the high-quality raw materials.

- **Safety**

Reliable drying even in unfavourable climatic conditions, due to high water retention in comparison to conventional levelling compounds.

For more information visit: www.uzin.com/GenerationS

WATER RETENTION OF UZIN NC 112 TURBO

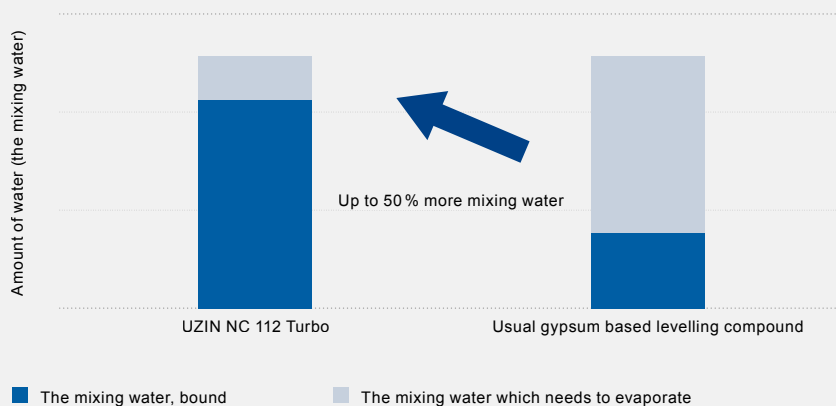

**UZIN NC 112 TURBO
BINDS UP TO 115 %
MORE MIXING WATER
COMPARED TO A CON-
VENTIONAL GYPSUM
LEVELLING COMPOUND.**

New innovative opening.

Super Fast Technology:
Ready to accept floor
coverings after 6 hours.

High-strength C 40
according to EN 13813.


Superior installation charac-
teristics with excellent flow,
producing a very smooth
surface as well as time and
cost savings.



ÖKOLINE



READY TO ACCEPT FLOOR COVERINGS DEPENDING ON THICKNESS*

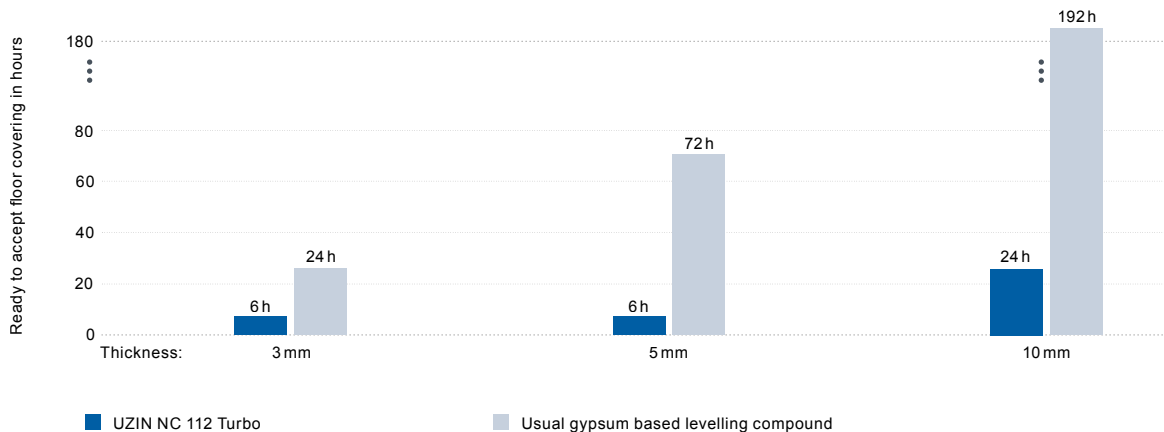

*At 20°C/68°F and 65% relative humidity.



“The new UZIN NC 112 Turbo revolutionizes the area of gypsum levelling compounds: For floor coverings to be installed after only six hours is simply unique.”

Dr. Markus Gretz, Head of Research & Development for Dry Mortar

UZIN · A Brand of Uzin Utz AG

Uzin Utz AG | Dieselstrasse 3 | D-89079 Ulm
 Telephone +49 (0)731 4097-0 | Telefax +49 (0)731 4097-110
 E-Mail info@uzin.com | www.uzin.com