

SAFETY. STRENGTH. SPEED.

UZIN NC 170 LevelStar NEW – for even more safer drying.



UZIN NC 170 LevelStar NEW: to be on the safe side, even under unfavourable building site conditions.

The introduction of the premium levelling compound UZIN NC 170 LevelStar in 2009 has set a standard that has been unparalleled so far. But we always look at ways to continually improve our products. We have therefore developed the Level Plus Effect with a new type of bonding agent technology, which we have called the Level Plus Effect S. The outstanding characteristics, such as superior flow, the excellent absorption capacity despite the high strength, and a very smooth surface, are preserved. However, UZIN NC 170 LevelStar NEW is now even more reliable, faster and stronger. Thanks to the new, reactive binding agent and innovative additive, a larger proportion of the mixing water is bound within the levelling compound. As a result less water evaporates and the smoothing compound dries quicker.

UZIN NC 170 LevelStar NEW is ready accept most floor coverings after just six hours when applied at 5 mm. Therefore setting a new benchmark for standard drying smoothing compounds. The new "Super Fast Technology" from UZIN also improves the drying performance even in poor climate conditions.

- **Safety**

Reliable drying even in unfavourable climatic conditions, due to high water retention in comparison to conventional levelling compounds.

- **Strength**


Strong surface strength and high strength development because of the high-quality raw materials.

- **Speed**

Ready to accept floor coverings after 6 hours because of an innovative, reactive binding agent and new additive.

For more information visit: www.uzin.com/GenerationS

WATER RETENTION UZIN NC 170 LEVELSTAR NEW

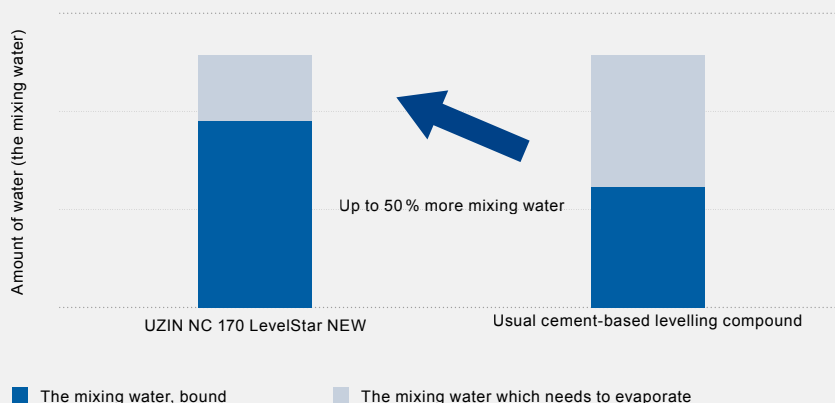

UZIN NC 170 LEVELSTAR NEW BINDS UP TO 50 % MORE MIXING WATER COMPARED TO A CONVENTIONAL CEMENT-BASED LEVELLING COMPOUND.

Safe drying even in unfavourable climatic conditions.

New innovative opening.

Ready to accept floor coverings after 6 hours.

Excellent absorbency despite the high strength C 40 according to EN 13813. Saves time when installing high quality floor coverings.


Superior installation characteristics with excellent flow, producing a very smooth surface as well as time and cost savings.



ÖKOLINE



READY TO ACCEPT FLOOR COVERINGS DEPENDING ON THICKNESS *

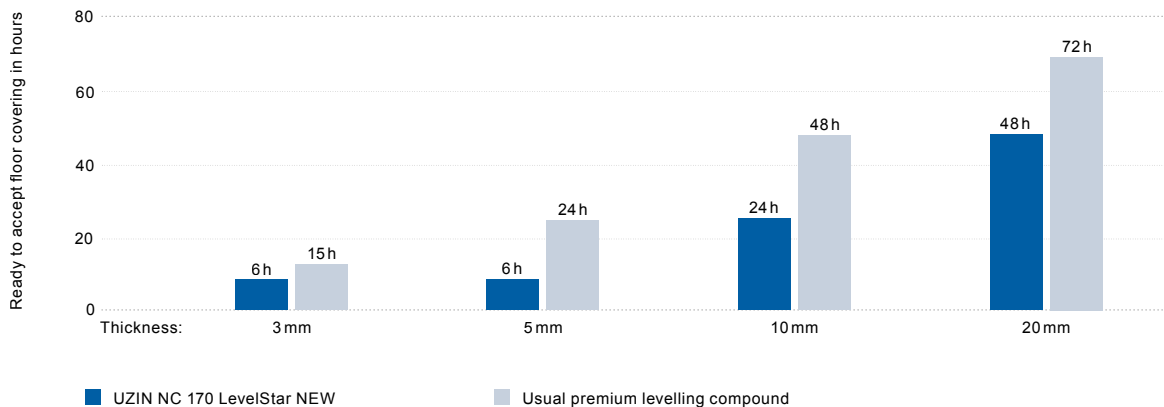

* At 20 °C / 68 °F and 65 % relative humidity.



“Our most successful cement-based levelling compound, UZIN NC 170 LevelStar NEW, ensures reliable drying even under unfavourable building site conditions.”

Markus Brendle, Product Management

UZIN - A Brand of Uzin Utz AG

Uzin Utz AG | Dieselstrasse 3 | D-89079 Ulm
 Telephone +49 (0)731 4097-0 | Telefax +49 (0)731 4097-110
 E-Mail info@uzin.com | www.uzin.com